



# ProJet<sup>®</sup> x60 Series

## Professional 3D Printers

**Fast**  
Full Color  
**Affordable**



*New England Academic Representative:*



**Technology Education Concepts**

1-800-338-2238 | [www.TECedu.com](http://www.TECedu.com) | [info@TECedu.com](mailto:info@TECedu.com)



**3DSYSTEMS<sup>®</sup>**

# ProJet® x60 Professional Printers set the standard for true full color printing, speed and affordability

## UNIQUELY FULL COLOR

**Color and high quality dramatically communicate design intent**

- Produce realistic or vivid color models in one step
- Better communicate the look, feel, and style of product designs
- 3D print text labels, logos, design comments, or images directly onto models
- A range of options, from monochrome printing to professional quality color
- Multiple print heads provide the best range of accurate and consistent colors

## FASTEST PRINT SPEED

**High speed and throughput for a range of applications**

- 5x-10x faster than all other technologies
- Output models in hours, not days
- Build multiple models at the same time
- Support an entire department with ease

## SAFE, OFFICE FRIENDLY & EASY TO USE



**Ideal for everyday use in any office or school**

- Quiet, safe, odor free
- Continuous negative pressure contains airborne particles
- Eco-friendly, non-hazardous build materials
- Zero liquid waste
- No support structures to remove, no cutting tools or toxic chemicals
- Requires minimal training and expertise
- Intuitive control panel for easy operation

## LOWEST OPERATING COST

**Affordable for all environments**

- Unused core material is recycled for the next build, eliminating waste
- No physical supports are necessary
- Part costs are a fraction of competitive technologies
- Based on reliable, affordable ColorJet Printing (CJP) technology

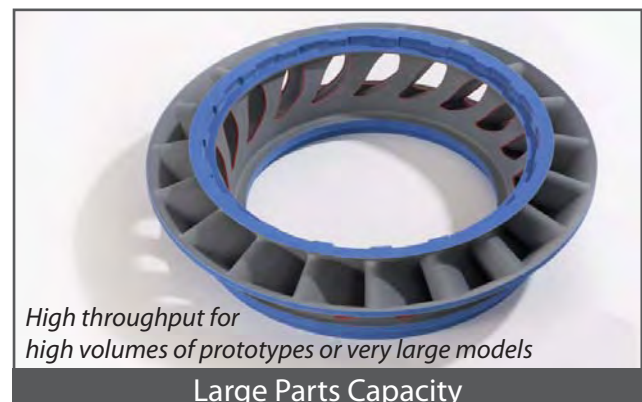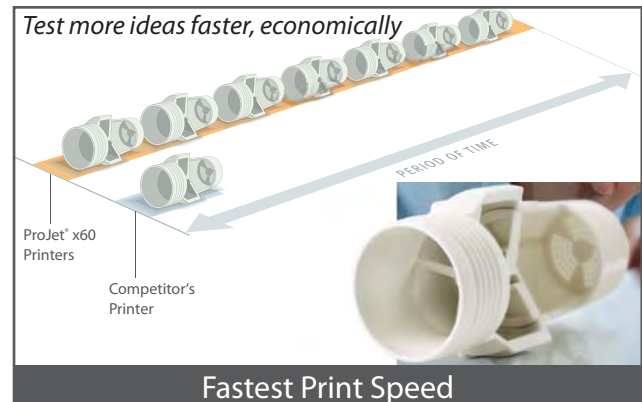

# ProJet® x60 Series

Professional 3D Printers

Extend Innovation. Extend Production. Extend Choices.



ProJet® 160

ProJet® 260C

ProJet® 360

ProJet® 460Plus

ProJet® 660Pro

ProJet® 860Pro

	ProJet® 160	ProJet® 260C	ProJet® 360	ProJet® 460Plus	ProJet® 660Pro	ProJet® 860Pro
Resolution	300 x 450 dpi	300 x 450 dpi	300 x 450 dpi	300 x 450 dpi	600 x 540 dpi	600 x 540 dpi
Color	White (monochrome)	Basic CMY	White (monochrome)	Full CMY	Full CMYK	Full CMYK
Pastel or vibrant color options					•	•
Minimum Feature Size	0.016 inches (0.4 mm)	0.016 inches (0.4 mm)	0.006 inches (0.15 mm)	0.006 inches (0.15 mm)	0.004 inches (0.1 mm)	0.004 inches (0.1 mm)
Layer Thickness	0.004 inches (0.1 mm)	0.004 inches (0.1 mm)	0.004 inches (0.1 mm)	0.004 inches (0.1 mm)	0.004 inches (0.1 mm)	0.004 inches (0.1 mm)
Vertical Build Speed	0.8 inch/hour (20 mm/hour)	0.8 inch/hour (20 mm/hour)	0.8 inch/hour (20 mm/hour)	0.9 inch/hour (23 mm/hour)	1.1 inch/hour (28 mm/hour)	0.2 – 0.6 inch/hour (5 – 15 mm/hour); speed increases with volume of prototypes
Prototypes per Build*	10	10	18	18	36	96
Draft Printing Mode (monochrome)					•	•
Net Build Volume (xyz)	9.3 x 7.3 x 5 inches (236 x 185 x 127 mm)	9.3 x 7.3 x 5 inches (236 x 185 x 127 mm)	8 x 10 x 8 inches (203 x 254 x 203 mm)	8 x 10 x 8 inches (203 x 254 x 203 mm)	10 x 15 x 8 inches (254 x 381 x 203 mm)	20 x 15 x 9 inches (508 x 381 x 229 mm)
Build Materials	VisiJet® PXL™	VisiJet® PXL™	VisiJet® PXL™	VisiJet® PXL™	VisiJet® PXL™	VisiJet® PXL™
Number of Jets	304	604	304	604	1520	1520
Number of Print Heads	1	2	1	2	5	5
Automated Setup and Self Monitoring	•	•	•	•	•	•
Core™ Recycling	•	•	•	•	•	•
Automatic Build Platform Clearing				•	•	•
Fine Core™ Removal	Accessory	Accessory	Integrated	Integrated	Integrated	Accessory
Integrated Materials	•	•	•	•	•	•
Intuitive Control Panel	•	•	•	•	•	•
E-mail Notice Capability	•	•	•	•	•	•
Tablet/Smartphone Connectivity	•	•	•	•	•	•
Print3D App	Remote monitoring and control from tablet, computers and smartphones					
Input Data File Formats Supported	STL, VRML, PLY, 3DS, FBX, ZPR	STL, VRML, PLY, 3DS, FBX, ZPR	STL, VRML, PLY, 3DS, FBX, ZPR	STL, VRML, PLY, 3DS, FBX, ZPR	STL, VRML, PLY, 3DS, FBX, ZPR	STL, VRML, PLY, 3DS, FBX, ZPR
Client Operating System	Windows® 7 and Vista®	Windows® 7 and Vista®	Windows® 7 and Vista®	Windows® 7 and Vista®	Windows® 7 and Vista®	Windows® 7 and Vista®
Operating Temperature Range	55-75°F (13 - 24 °C)	55-75°F (13 - 24 °C)	55-75°F (13 - 24 °C)	55-75°F (13 - 24 °C)	55-75°F (13 - 24 °C)	55-75°F (13 - 24 °C)
Operating Humidity Range	20-55% - non-cond.	20-55% - non-cond.	20-55% - non-cond.	20-55% - non-cond.	20-55% - non-cond.	20-55% - non-cond.
Printer Dimensions	29 x 31 x 55 inches (74 x 79 x 140 cm)	29 x 31 x 55 inches (74 x 79 x 140 cm)	48 x 31 x 55 inches (122 x 79 x 140 cm)	48 x 31 x 55 inches (122 x 79 x 140 cm)	74 x 29 x 57 inches (188 x 74 x 145 cm)	47 x 46 x 68 inches (119 x 116 x 162 cm)
Printer Weight	365 lbs (165 kg)	365 lbs (165 kg)	395 lbs (179 kg)	425 lbs (193 kg)	750 lbs (340 kg)	800 lbs (363 kg)
Electrical	90-100V, 7.5A 110-120V, 5.5A 208-240V, 4.0A	90-100V, 7.5A 110-120V, 5.5A 208-240V, 4.0A	90-100V, 7.5A 110-120V, 5.5A 208-240V, 4.0A	90-100V, 7.5A 110-120V, 5.5A 208-240V, 4.0A	100-240V, 15-7.5A	100-240V, 15-7.5A
Noise						
Building	57 dB	57 dB	57 dB	57 dB	57 dB	57 dB
Core Recovery	66 dB	66 dB	66 dB	66 dB	66 dB	66 dB
Vacuum (open)	86 dB	86 dB	86 dB	86 dB	86 dB	86 dB
Fine Decoring	-	-	80 dB	80 dB	80 dB	-
Office Compatibility	•	•	•	•	•	•
Certifications	CE, CSA	CE, CSA	CE, CSA	CE, CSA	CE, CSA	CE, CSA

\* Based on baseball-size geometry.

www.3dsystems.com



333 Three D Systems Circle  
Rock Hill, SC 29730 USA  
Telephone +1 (803) 326-3948  
moreinfo@3dsystems.com

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, material combined with, or with end use. 3D Systems makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use.

© 2013 by 3D Systems, Inc. All rights reserved. Specifications subject to change without notice. The 3D Systems logo, stylized text, ProJet and VisiJet are registered trademarks of 3D Systems, Inc.

Issue Date: April 2013