




ABS KEVLAR KIMYA

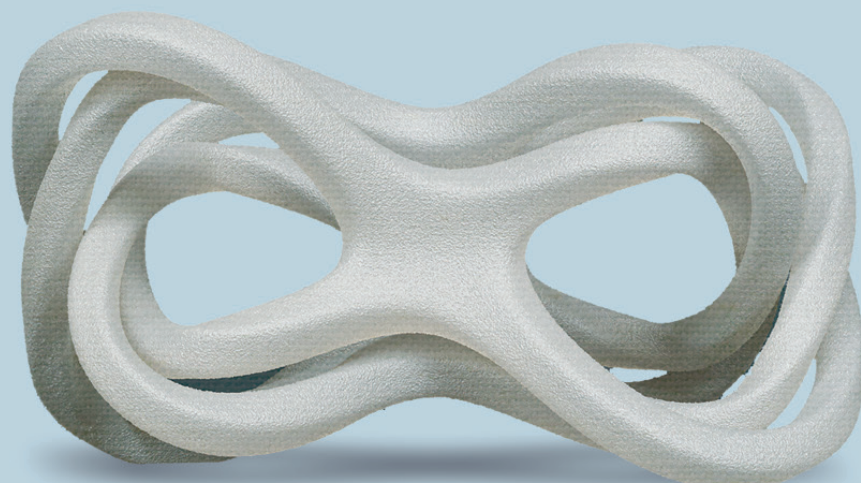

ABS KEVLAR has been designed for 3D printing by a precise formulation of aramid fibers into ABS materials

| **NO SHRINKAGE** | **LOW WARPING**
| **SMOOTH SURFACE** | **LIGHT WEIGHT OBJECTS**

FILAMENT PROPERTIES

DESCRIPTION	TEST METHODS	UNITS	VALUES
Diameter	INS-6712	mm	1.75 ± 0.1 2.85 ± 0.1
Density	ISO 1183	g/cm3	1.037
Humidity rate	INS-6711	ppm	< 10,000
MFI	ISO 1133	g/10min	14.8
Glass temperature tg	ISO 11357 DSC (10°C/min – 20 à 220°C)	°C	100
Melting temperature tf	ISO 11357 DSC (10°C/min – 20 à 220°C)	°C	n/a

KIMYA




PRINT PARAMETERS AND SPECIMENS DIMENSIONS

PRINT AXIS	XY
PRINT SPEED	50 mm/s
INFILL	100% - rectilinear
INFILL ANGLE	45°/-45°
EXTRUSION TEMPERATURE	260°C
PLATFORM TEMPERATURE	100°C


RESULTS

TENSILE TEST

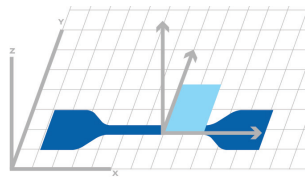


Dim.(mm): 75x12.5x2
Specimen type: ISO 527-5A

BENDING TEST - CHARPY IMPACT

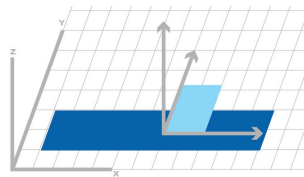

Dim. (mm): 80x10x4

HARDNESS

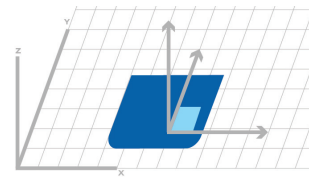

Dim.(mm): 45x45x4

PRINTED SPECIMENS PROPERTIES

	PROPERTIES	TEST METHODS	UNITS	VALUES
TENSILE TEST	Tensile modulus	ISO 527	MPa	1,775
	Tensile strength	ISO 527	MPa	31.1
	Elongation @tensile strength	ISO 527	%	2.3
	Tensile stress @break	ISO 527	MPa	27.7
	Tensile elongation @break	ISO 527	%	4.9
BENDING TEST	Flexural modulus	ISO 178	MPa	1,509
	Flexural stress @3.5%	ISO 178	MPa	44.7
	Deformation @flexural strength	ISO 178	%	>5*
CHARPY IMPACT	Charpy impact strength (notched type A)	ISO 179	kJ/m ²	8.86
HARDNESS	Hardness	ISO 868	Shore D	65.2

*According to ISO 178, end of the test at 5% deformation even if there is no specimen break

The results presented are the averaged values of the ABS KEVLAR 1.75mm range.
TFor each test, 5 specimens per reference, previously placed at least 24 hours in climatic chamber (23°C - hygrométrie : 50%) have been tested.